


SunPOS 15.6

POS Workstation





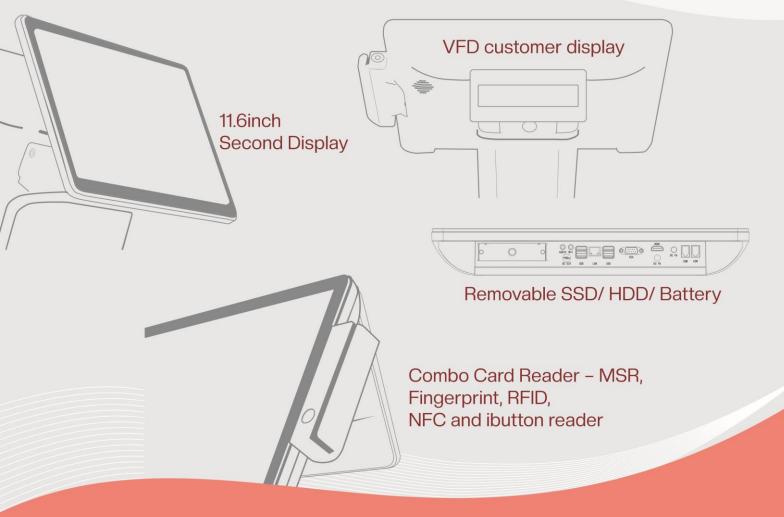

- Ultra Slim Bezel
- ▶ 15.6inch HD Display
- Variety of configurations: J4125, I3-5005, I5-4200
- True-Flat Front Bezel
- Projected Capacitive Touch screen

Specifications



Config	CPU	Intel® Celeron® J4125 - 2.0GHz Fanless	Intel 4th/5th U series CPU, i3-5005, i5 -5200
	Ram	4Gb DDR4 SO DIMM(Opt 8Gb)	4Gb DDRIII (Opt 8Gb)
	EMMC/SSD/HDD	64Gb SSD (Opt 128Gb) MSATA	64Gb SSD (Opt 128Gb)MSATA
Screen	Screen Size	15.6	15.6
	Interface	EDP	EDP
	Resolution	1366*768	1366*768
	Brightness	220 - 250 nits (Opt 250 - 300 nits)	220 - 250 nits (Opt 250 - 300 nits)
ouch	Touch Panel	Capacitive , 10 Points, IP54	Capacitive , 10 Points, IP54
S	Android	Windows 8, 10, Linux	Windows 7, 8,8.1, 10, Linux
Interfaces	RS232	2 (Powered)	1
	USB	2 x USB 2.0, 2 x USB 3.0 (I/O), 3 x USB 2.0	2 x USB 2.0, 2 x USB 3.0 (I/O), 3 x USB 2.0
	TF Card	-	-
	Micro USB	-	-
	HDMI	1	1
	VGA	1	1
	Audio	1	1
	LAN	100M	100M
	RJ11 Cash Drawer	-	
	Speakers	1	1
	PCIE / M2	1 x M2 (For WIFI OR 4G)	1 x PCIE (For WIFI OR 4G)
Adapter	Power Adapter	12V, 4A	12V,4A
	Color	Matte Black, Pearl White	Matte Black, Pearl White
Optional			
	VFD Customer Display	2*20, USB Int, 5V	2*20, USB Int, 5V
	Second Display	11.6inch without Touch screen	11.6inch without Touch screen
	MSR	3 Track, USB	3 Track, USB
	ibutton Reader	Yes	Yes
	RFID + NFC	HF + NFC	HF + NFC
	Finger Print Reader	Yes	Yes
	Battery Backup	18.5V,2600 Mah	18.5V,2600 Mah
	Single Screen	2 Hours Battery Back -up	1.5 Hours Battery Back-up
	Double Screen	1 Hours Battery Back -up	1Hours Battery Back-up
	Wi-Fi	802.11b/g/n/ac	802.11b/g/n/ac
	Bluetooth	4.0	4.0
	3G/4G Sim Card	4G	4G





PoS Tektronics Limited

Rooms 1318-19, 13 / F, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hong Kong pcpos@yahoo.com

www.postektronics.com



