

ASCII Code 39 Table

			
0	1	2	3
			
4	5	6	7
			
8	9		
			
A	B	C	D
			
E	F	G	H
			
I	J	K	L
			
M	N	O	P
			
Q	R	S	T
			
U	V	W	X
			
Y	Z		

Wireless Handheld Gun Type Scanner



Mac OS X Quick Connection Guide

Version 1.00


Connecting to Mac

Connect to Mac OS X via SPP Master Mode

Please follow the below instructions carefully to pair the scanner with your Mac computer.


Step. 1

Press and hold the trigger for 2 seconds to power on the scanner.




Step. 2

On your Mac computer, select "About This Mac" then "More info".

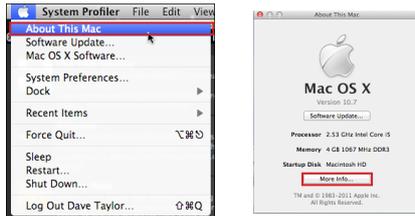

Step. 3

Select "Bluetooth" to view the Bluetooth address.


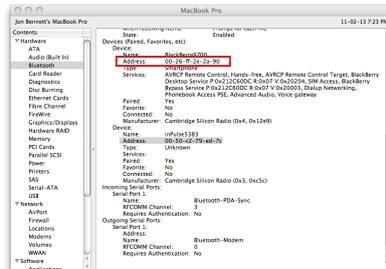


Step. 4

Enable the serial program you use for scanning (such as ZTerm).

Step. 5

Enable Scanner SPP Master mode by scanning the following barcodes.



Step. 6

Scan "Set wireless address" to set the Bluetooth address.



Step. 7

Use the ASCII table to scan the 12 digit Bluetooth address you found in Step 3. For example: if the address is "011B1345600", scan "0", "0", "1", "1", "B", "1", "3", "4", "5", "6", "0", "0" from ASCII barcode labels.

Step. 8

Scan "Confirm Setting" to store the address then scan "Pairing" to pair the scanner to the computer. (or you can print out a barcode containing the full address and scan it)



Step 9

Quickly enter the PIN code on the computer. The default PIN code is "12345678". The scanner is now paired to the Mac.

Step 10

Enable the COM port using the serial program started in Step.4 to begin scanning.